

OSIS Instrument Solutions 003023748-K No. 8, Jalan Waterfall 1

No. 8, Jalan Waterfall 1 48000, Rawang, Selangor

Tel: 012-2919329
Email: osis.instrument@gmail.com
Web: www.osis-instrument.com

# **Fourier Transform Infrared Spectrometer (FTIR)**



FTIR-990 Fourier transform infrared spectrometer is an independent research and development of products, it is the most competitive FTIR on the world, convenient installation, simple use, convenient maintenance, our FTIR is wildly used by materials science, bio pharmaceutical, petrochemical, food safety and other industry analysis instruments, it's also adopted by university laboratory for scientific research and teaching.

### **Specifications**

Wavenumber Range	7800 ~ 375 cm-1
Interferometer	Michelson interferometer with 30 degrees of
	incidence angle
100%τline tilt range	Better than 0.5τ%(2200~1900cm <sup>-1</sup> )
Resolution	1 cm-1
Wave Number Repeatability	1 cm-1
Signal Noise Ratio	30000:1 (DLATGS, resolution@4cm-1. sample and background scan for 1 min@2100cm-1)
Detector	High resolution DLATGS detector with  Moisture-proof coating
Beamsplitter	KBr coated with Ge (Made in USA)
Light Source	Long life, air cooled IR light source (Made in USA)
Electronic System	A/D converter of 24 bits at 500MHz, USB 2.0
Power	110-220V AC, 50-60Hz
Dimension	450mm×350mm×235 mm
Weight	14Kg

### Reliable optical system

> The design integrates main components to an optical bench machined from a cast aluminum, accessories will

OSIS Quality & Reliability

OSIS Instrument Solutions 003023748-K

No. 8, Jalan Waterfall 1 48000, Rawang, Selangor Tel: 012-2919329

Email: osis.instrument@gmail.com
Web: www.osis-instrument.com

be mounted by needle positioning, no need to adjust.

> Sealed Michelson interferometer, combined with moisture proof beam splitter and bigger Moisture proof agent box to get 5 times moisture proof ability.

- The temperature observation window adopts 7-degree forward design, which conforms to the principle of human engineering, easy to observe and convenient to replace the molecular sieve.
- > The design of push pull type sample bin can greatly reduce the interference of water and carbon dioxide in the air on the test results, and it's designed larger to access various accessories.
- ➤ Working power less than 30W, green environmental protection。

### High stable components

- > The sealing interferometer uses USA imported gold cube corner reflector with high reflectivity and angular accuracy.
- With high performance long life ceramic light source imported from USA, the luminous efficiency is as high as 80%.
- > VCSEL laser imported from USA with high performance.
- ➤ Highly sensitive DLATGS detector imported from USA.
- > It's off axis mirror using SPDT cutting process, with excellent optical efficiency and system consistency.
- The imported special steel rail, heavy load, low friction, ensure data stability and repeatability.

### Powerful intelligent software


- Intelligent human-computer interaction and operation guide design, you can quickly get started and skilled whether you have contacted the FTIR software.
- Unique spectral data acquisition monitoring preview mode, land acquisition process.
- Provide standard library of approximately 1800 spectra for free, include most common Compounds, drugs, oxides.
  - We also can provide a variety of professional infrared Atlas (220000 pieces), covering a variety of industries, to meet the general retrieval, users can customize the new spectral database retrieval, flexible and convenient. The fingerprint library includes: the national pharmacopoeia library, National Veterinary Pharmacopoeia library, rubber library, gas spectrum Gallery, molecular spectrum Gallery, protein and amino acid spectrum library, judicial Library (dangerous goods, chemicals, pharmaceuticals etc.), inorganic organic spectral library, library, solvent spectrum library, library of food additives flavor library, paint, library etc. (As appendix).
- ➤ Software with GB / T 21186-2007 national standard calibration function and JJF 1319-2011 infrared calibration standard calibration function.



OSIS Instrument Solutions 003023748-K

Osis instrument Solutions of No. 8, Jalan Waterfall 1
48000, Rawang, Selangor Tel: 012-2919329
Email: osis.instrument@gmail.com
Web: www.osis-instrument.com

# **Spectrum sample**

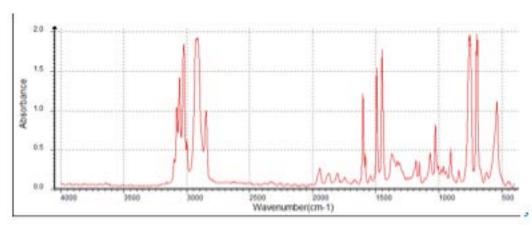

# **Usual Optional Parts:**

# **Znse Crystal ATR Sheet Mold** Press the powder into a window in order to test. Diameter 13mm, thickness 0.1-0.5mm, without demolding.




OSIS Instrument Solutions 003023748-K No. 8, Jalan Waterfall 1 48000, Rawang, Selangor Tel: 012-2919329 Email: osis.instrument@qmail.com Web: www.osis-instrument.com

### **Agate mortar**

Grand solid sample into powder

Diameter 70mm

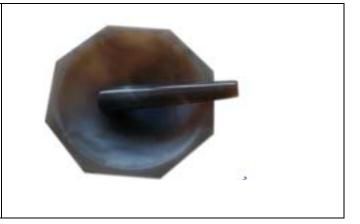

# **Appendix**

# IR Spectrum Data Base (Optical)

Aldrich FT-IR Collection Edition II	18454
HR Aldrich FT-IR Collection Edition I	10505
HR Aldrich Hydrocarbons	1199
HR Hummel Polymer and Additives	2011
HR Industrial Coatings	1961
HR Nicolet Sampler Library	842
HR Polymer Additives and Plasticizers	1799
HR Rubber Compounding Materials	350
HR Spectra Polymers and Plasticizers by ATR	204
HR Spectra Polymers and Plasticizers by ATR-corrected	204
HR Sprouse Polymer Additives	325
HR Sprouse Polymer by ATR	500
HR Sprouse Polymer by Transmission	600
Polymer Additives and Plasticizers	1799
Aldrich Polymers Library	275
Sigma Steroids	3011
Sigma Sugars and Carbohydrates	614